



# High Sensitivity UV Sensor Module

Model: HSP-UVx-1y

## General features:

- Sturdy metal case with sapphire window
- Single power supply and low power consumption
- Analog 0-5 V or 4-20 mA output
- High sensitivity and proved reliability
- Optional solar-blind sensor with high rejection ratio

**Applications:** weak UV light detection, arc detection, corona discharge detection, bio-chemical UV detection, flame detection

## Specifications:


General parameters				
Dimensions	Window diameter (mm)	Weight (g)	Case material	
See drawing below	5	105	Al	
Parameters	Symbol	Value	Unit	Remark
Maximum ratings				
Operation temperature	T <sub>op</sub>	-20-65	°C	
Storage temperature	T <sub>sp</sub>	-30-85	°C	
Electro-optical characteristics (25 °C)				
Supply voltage	V <sub>cc</sub>	7-24	V	DC
Output signal	I <sub>out</sub>	4-20	mA	2 wire circuit (HSP-UVx-11) 3 wire circuit (HSP-UVx-12)
	V <sub>out</sub>	0-5	V	3 wire circuit (HSP-UVx-13)
Detection wavelength range <sup>1</sup>		220-280	nm	HSP-UVC-1y <sup>2</sup>
		220-325		HSP-UVB-1y
		220-370		HSP-UVA-1y
		290-440		HSP-UVV-1y
UV power intensity measurement range	P	0-10		



## High Sensitivity UV Sensor Module


Model: HSP-UVx-1y

Drawing (unit: mm)

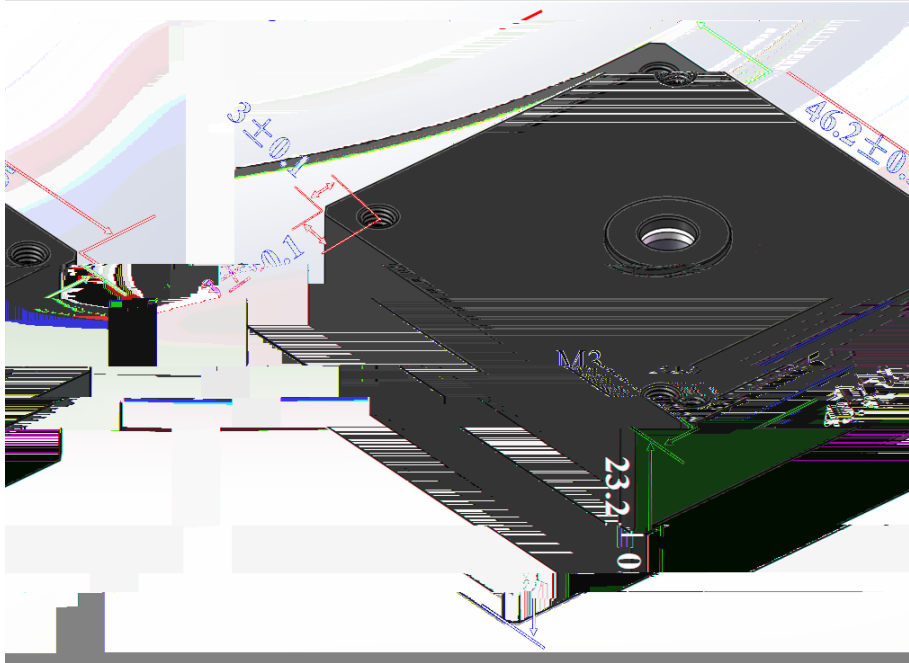

### Touchscreen UV radiometer (optional)

- Fully compatible with all GaNo Opto s UV sensor probes
- Real time display of UV power density, UV source accumulated service time and UV source output efficiency
- System settings for UV output calibration, timer reset, operation status cartoon, threshold of failure alarm and initial 100% output efficiency normalization
- One channel input and 24 V power supply
- Customized Chinese and English versions

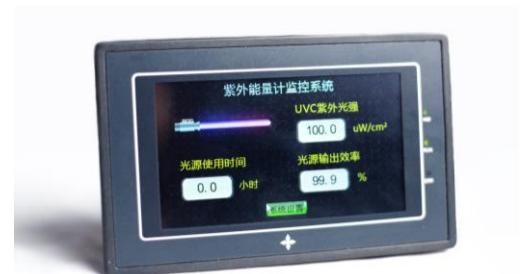

### Lite-edition UV radiometer (optional)

- Fully compatible with all GaNo Opto s UV sensor probes
- 5 digital real time display of UV power density
- Pre-calibration or re-calibration for specific UV light source upon request
- Optional RS-485 or relay output
- One channel input and 9-24 V power supply

