



UV Sensor Probe

Model: WP-UVx-G3/4-4y

General features:

- Water-resistant probe
- Single power supply
- Analog 0-5 V or 4-20 mA output
- High sensitivity and proven reliability

Applications: UV lamp monitoring, UV power measurement for waste/ballast water sterilization, UV curing process control, UV phototherapy monitoring

Specifications:

General parameters

Dimensions	Window diameter (mm)	Weight (g)	Case material
See drawing below	11	160	316L

Parameters	Symbol	Value	Unit	Remark
------------	--------	-------	------	--------

Maximum rating

lopvra




UV Sensor Probe



Model: WP-UVx-G3/4-4y

Drawing (unit: mm)

Cable:

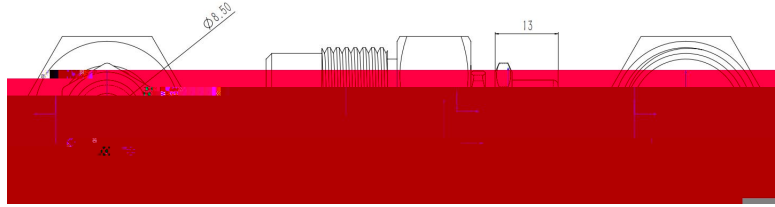

Circular connector:

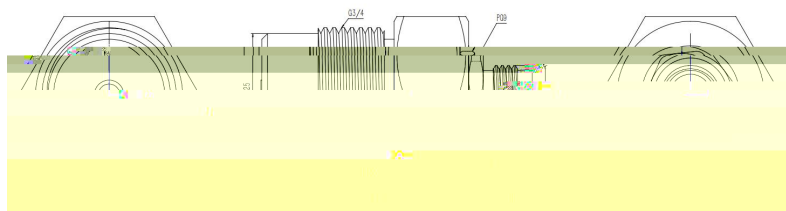


connector view
5 pin M 12x1
RSFM5

5-pin analog plug:

pin 1= V_{CC} , pin 2=null,
pin 3= I_{out} / V_{out} , pin 4=GND / null,
pin 5=null

Touchscreen UV radiometer (optional)

- Fully compatible with all GaNo Opto's UV sensor probes
- Real time display of UV power density, UV source accumulated service time and UV source output efficiency
- System settings for UV output calibration, timer reset, operation status cartoon, threshold of failure alarm and initial 100% output efficiency normalization
- One channel input and 24 V power supply
- Customized Chinese and English versions

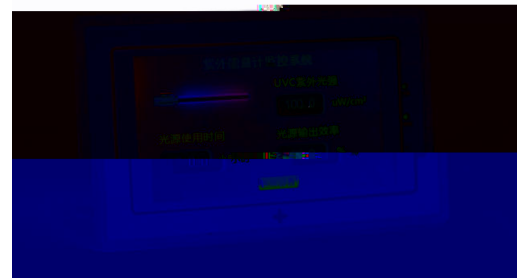

Lite-edition UV radiometer (optional)

- Fully compatible with all GaNo Opto's UV sensor probes
- 5 digital real time display of UV power density
- Pre-calibration or re-calibration for specific UV light source upon request
- Optional RS-485 or relay output
- One channel input and 9-24 V power supply

